

Fyr Pak Backpack Pump



The Fyr Pak is a lightweight portable centrifugal pump mounted on a padded adjustable backpack frame. Weighting only 34 pounds, the Fyr Pak can pump water from draft, relay or hydrant. It can go where a fire engine can't reach. It will deliver discharge pressures up to 220 PSI (15.5 bar) and flows to 75 GPM (285 LPM) from draft. The unit includes an automatic recoil starter, a spark resisting muffler, an engine overspeed control switch, a priming pump, and a priming valve.

Technical Specifications Pump

Model and Type: Centrifugal, bolted to engine

Suction: 1-1/2 inch Male NST

Discharge: 1-1/2 inch Male NST

Head: Lightweight, high strength, corrosion resistant aluminum alloy

Volute: High strength aluminum alloy with machined waterways for maximum performance.

Impeller: Bronze enclosed type for maximum efficiency

Clearance Rings: Patented floating bronze clearance ring for minimum clearance to prevent rubbing, seizing, and alignment problems.

Pump Shaft: Engine's horizontal shaft serves as pump shaft, protected against corrosion by a bronze sleeve.

Shaft Seal: Self-adjusting, self-lubricated using a special ceramic seat for wear and shock resistance.

Priming: Compact hand operated position type brass priming pump provided

Engine


Make: U.S. Motor Power Inc.

Type: Single cylinder, two-cycle gasoline

Horsepower: 8 HP at 7,000 RPM

Cooling: Forced Air

Starting: Water-resistant, solid state ignition

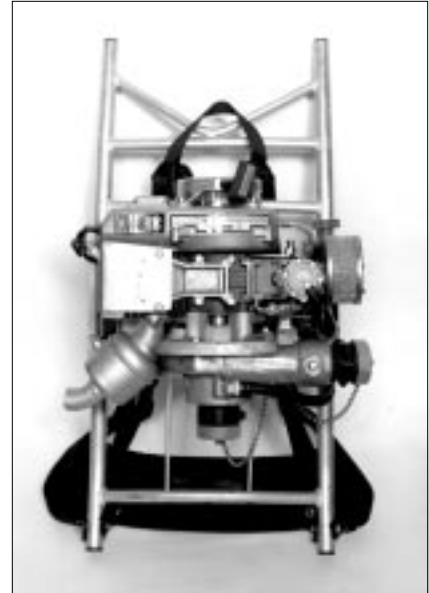

Air Filter: Wire mesh element protects against impurities

Fuel Filter: 75 micron in-line fuel filter; an integral fuel strainer is built into the fuel pump.

OPTIONS

Stowaway Accessory Package: 100 feet x 1-1/2 inch hose, adjustable nozzle, tune-up kit, and one quart N.M.M.A. (BIA) approved 2-cycle engine oil in a canvas carrying bag. (Part Number: 546-1060-01-0)
Maintenance hourmeter: LCD display (Part Number: 200-0780-06-0)

Weight & Dimensions

Weight: 34 pounds (15.5 kg)


Length: 32 inches (813 mm)

Width: 16.5 inches (420 mm)

Height: 13 inches (330 mm)

Ordering Part Number

545-2140-00-0

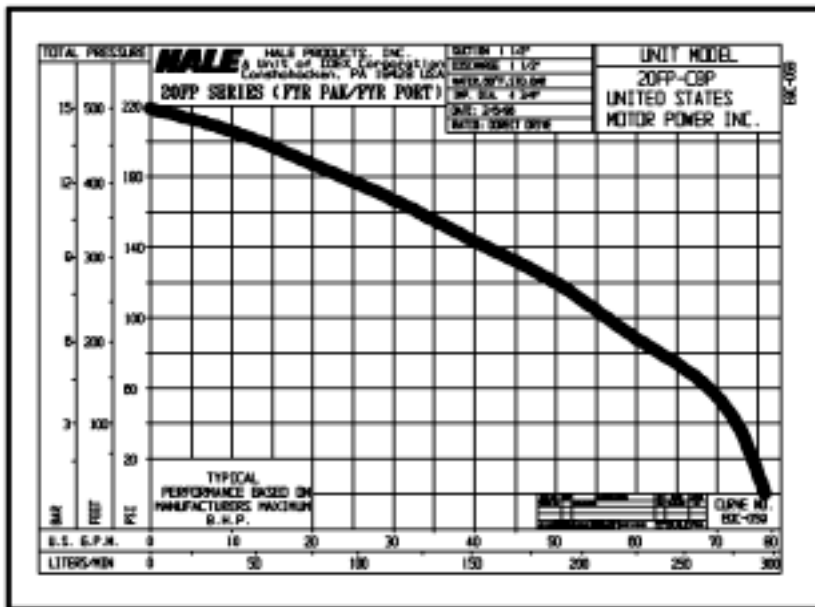

Hale Products
Fire Suppression Equipment Group
A Unit of IDEX Corp.
700 Spring Mill Avenue
Conshohocken, PA 19428
TEL: 610/825-6300
FAX: 610/825-9615
www.haleproducts.com

Class 1
Fire Suppression Equipment Group
A Unit of IDEX Corp.
607 NW 27th Avenue
Ocala FL 34475
Tel: 352-629-5020
www.class1.com

MADE IN THE USA



Note: Hale Products Inc. cannot assume responsibility for product failure resulting from improper maintenance or operation. Hale is responsible only to the limits stated in the product warranty. Product specifications contained in this material are subject to change without notice. Printed in U.S.A. Bulletin #327, Rev 4, 3/02 © 2002, Hale Products Inc.